



Parker Motion Controller

Intelligent Multi-Axis Motion Controller



ENGINEERING YOUR SUCCESS.



WARNING — USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Overview.....5

Product Overview.....6

Technical Characteristics.....9

 Parker Remote I/O System PACIO10

 Safety Controller10

 Dimensions11

Order Code..... 12

Parker Motion Controller - PAC

Overview

Description

The Parker motion Controller PAC is a PLC basing on ARM with integrated CODESYS. This programmable motion controller combines machine logic, real-time motion control and visualization into a standard based, performance driven, fan-less and easily mountable din rail solution.

The controller matches the PACIO modules, which can be attached directly to form a mechanically and electrically homogenous unit. In combination with these modules, it can take over complete machine control.

Equipped with a native, real-time EtherCAT bus, a modular interface slot, standard Ethernet and USB ports plus a built-in SD-card slot and the supported fieldbus options Profinet Slave, EtherCAT or EtherNet/IP the controller can be easily integrated and is suitable for a wide range of applications.

Programmed with CODESYS, efficient and powerful control systems can be designed based on IEC61131-3 and PLCopen motion standards. Offering the OPC UA server the controller is the perfect device for industry 4.0 communication.

Our PAC motion controller is available in two different versions:

PA120 and PAC340.

PAC 120 is suitable for many motion applications.

For higher demands on performance and memory the PAC340 is available. With its four processor cores, it also supports the CODESYS multicore feature.



General	PAC120
Function	Mini-IPC with integrated CODESYS SPS and EtherCAT master function for I/O modules systems PACHC and PACIO
Housing	Aluminium strap, plastic
Protection class	IP20
Mounting	35 mm DIN rail
Operation temperature	0 °C...+55 °C

Common Features

- Fan-less ARM processor technology
- Ethernet and EtherCAT
- Fieldbus options: EtherCAT, Profinet, EtherNet/IP, Modbus
- OPC UA server
- CODESYS V3.5
- CODESYS WebVisu
- CODESYS SoftMotion
- IEC61131-3 programming
- PLCopen motion control
- Web configuration tool
- SD card slot and USB interface
- Expandable with Parker PACIO modules
- DIN rail mounted



General	PAC340
Function	CODESYS PLC Motion Controller with a wide range of data interfaces
Housing	Aluminium strap
Protection class	IP20
Mounting	53 mm DIN rail
Operation temperature	Ambient operation temperature: (0 to +40) °C

Product Overview


Designed to maximize efficiency while exceeding performance expectations, the Parker Automation Controller (PAC) is programmed with the well-established CODESYS, an Integrated Development Environment (IDE) and comprises the PAC I/O System. Together these elements provide a powerful, standards-based programmable package designed to tackle the most demanding applications. The PAC system consolidates machine logic, signal handling, advanced motion, and visualization.

I/O Modules




The PAC I/O System comprises a variety of modules for digital, analog, temperature signals, high-speed counters, and communication interfaces.

PAC120 overview:

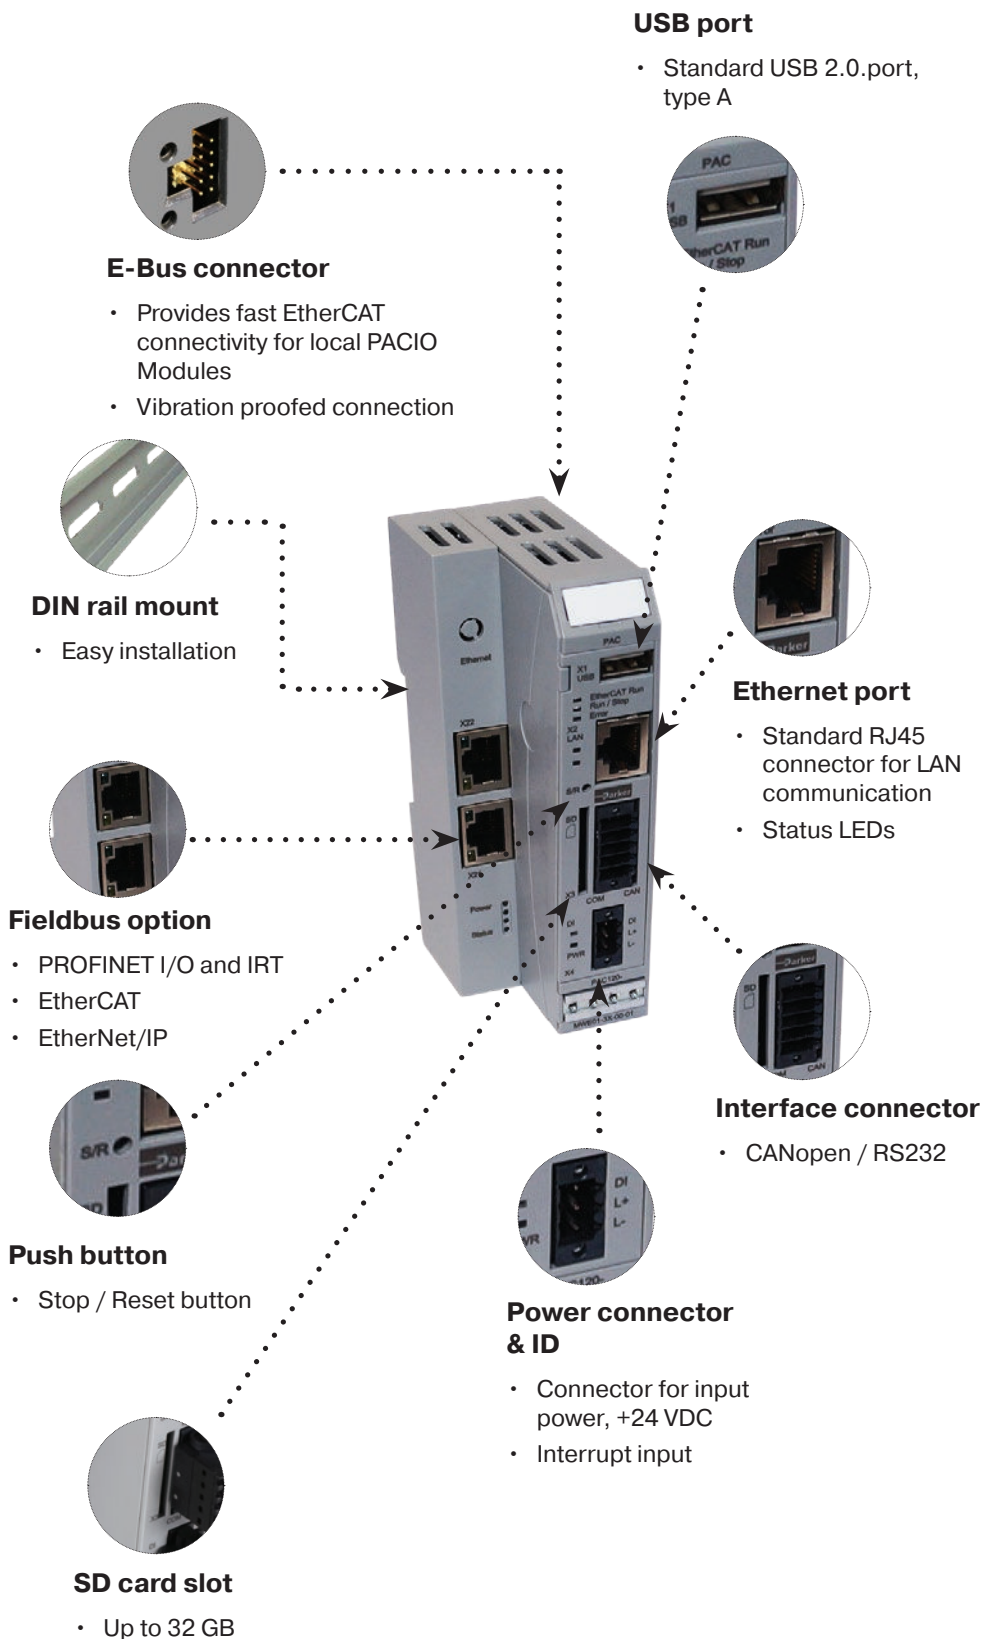


I/O Modules overview:

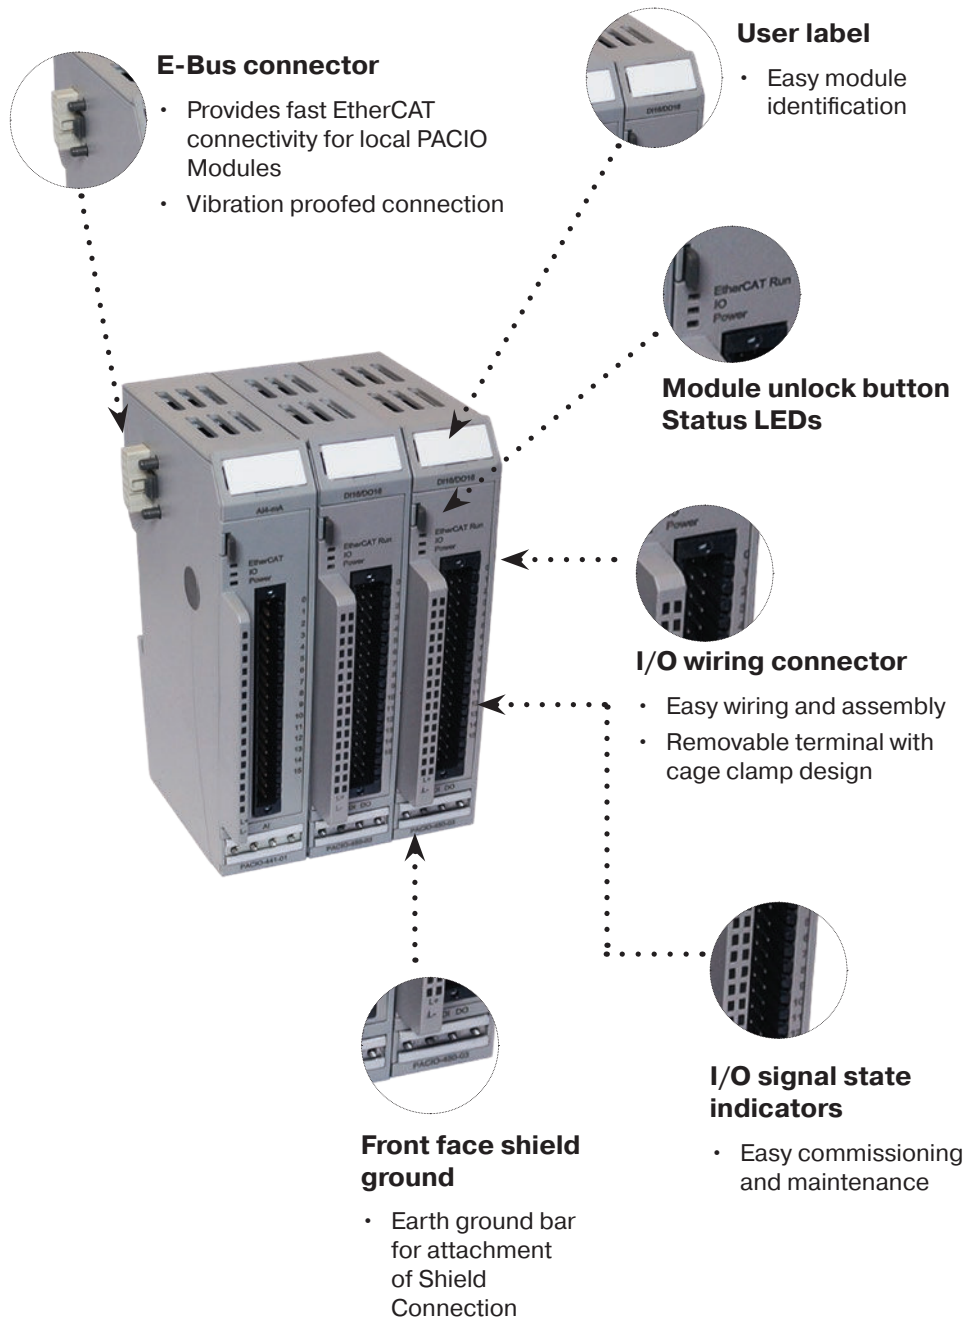


Software

CODESYS is the leading manufacturer-independent IEC 61131-3 automation software for engineering control systems. It's a software platform for industrial automation technology. The core of the platform is the IEC-61131-3 programming tool "CODESYS Development System". It offers practice-oriented, integrated solutions for the convenient configuration of automation applications. Everything is integrated in a single user interface

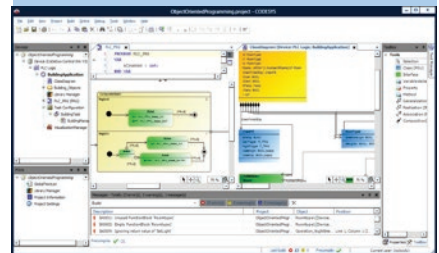


Engineers can work smarter, more efficiently and more effectively by choosing from the five IEC standard programming languages to optimize for an application, by using industry standard PLCopen Motion for motion control programming, deploying to the powerful simulation runtime for faster development and using online variable watch and trending for logic analysis.

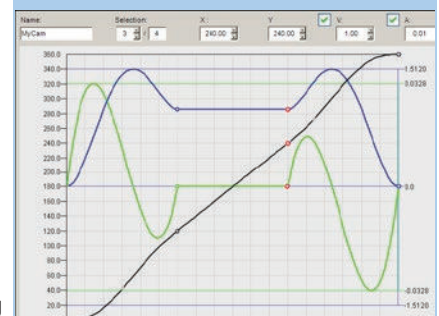

- IEC61131-3 programming system
- PLCopen motion control
- Simulation runtime
- Visualization
- CNC / robotics
- Industry 4.0 platform

PAC340 overview:

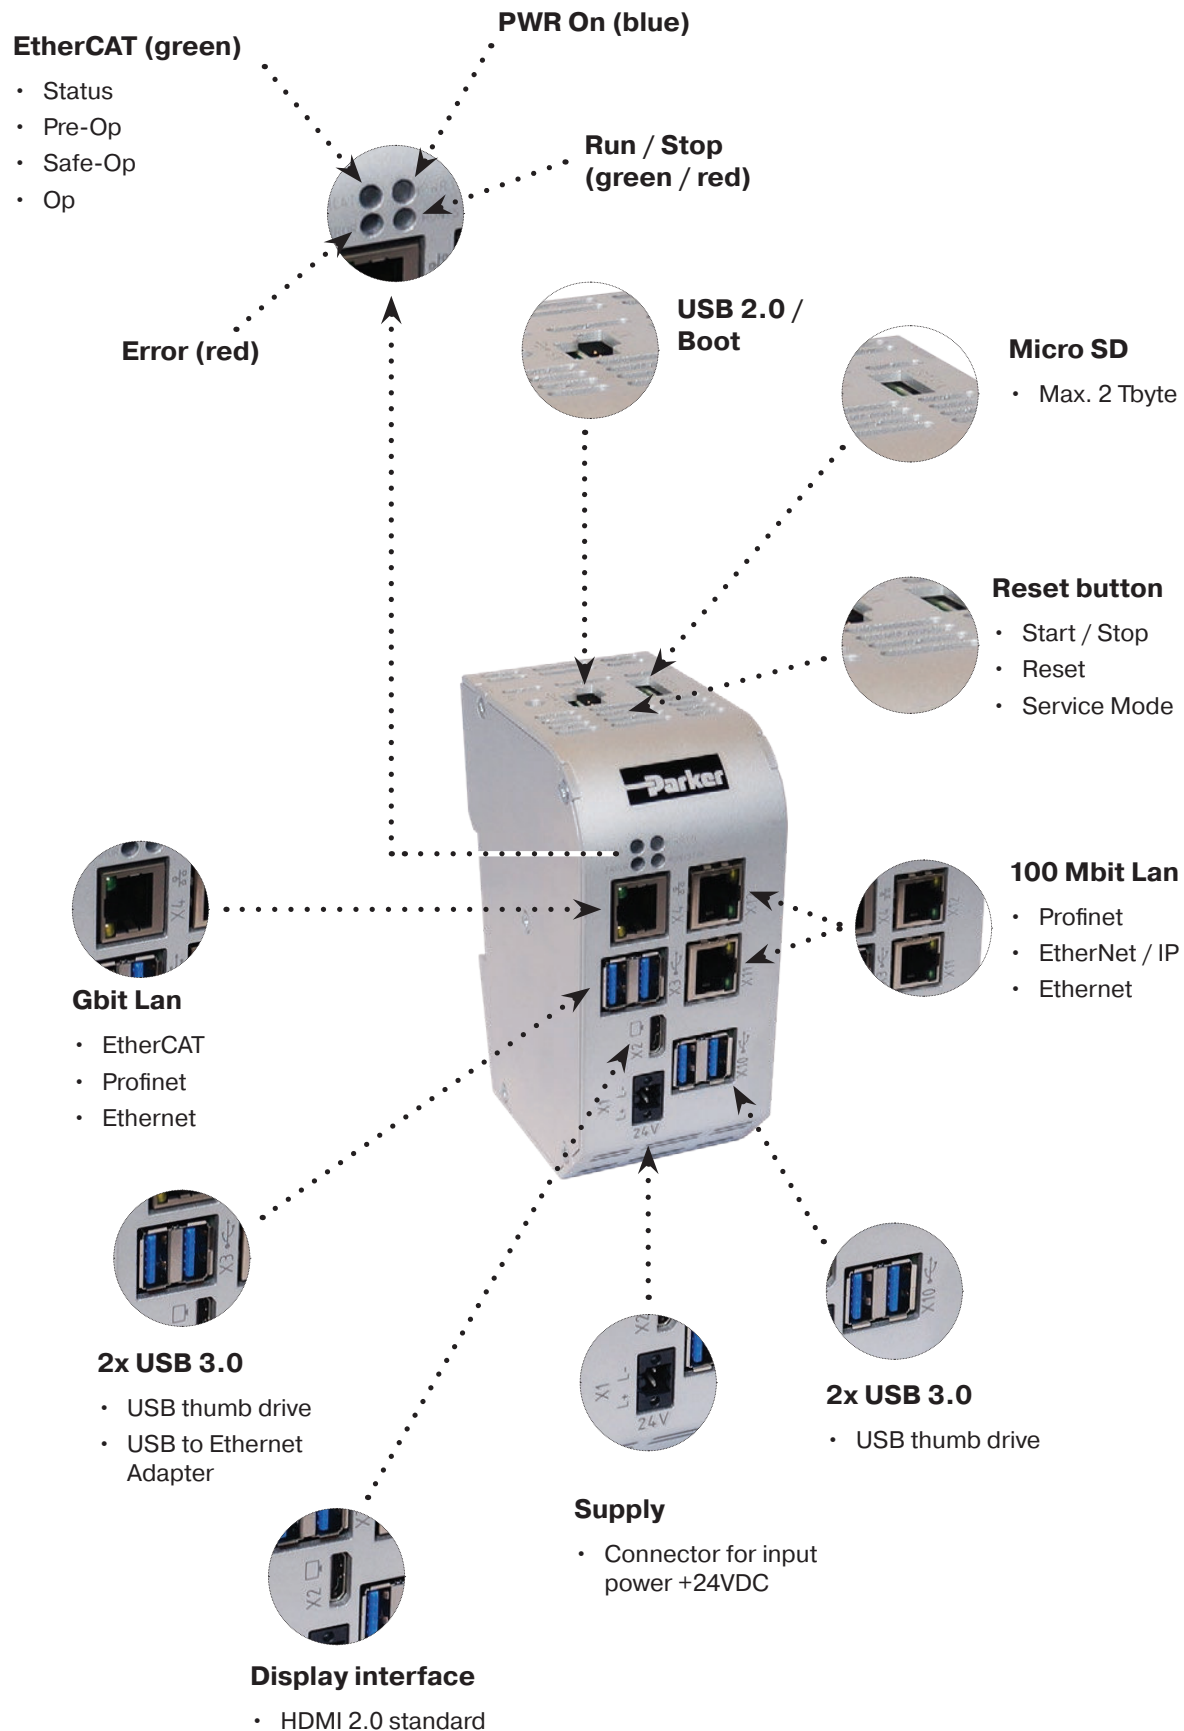

Technical Characteristics

Electrical	PAC120	PAC340
CPU	i.MX6 SoloX Freescale 1 GHz	BCM2711, 1.5GHz Quad Core
RAM / Flash	256 MB / 256 MB	2 GB / 8GB
Retain Memory	128 MB	200 MB
Operating system	Linux RT	Linux RT
Software	CODESYS V3 runtime softmotion	CODESYS V3 runtime softmotion
Network	1 x Ethernet 10/100 MBit	1 x Ethernet 10/1000 Base, RJ45 1 x Ethernet 10/100 Base 2-Port Switch
interfaces	1 x digital input, 1ms 1 x USB 2.0 1 x SD (HC) card slot	1 x digital display Interface 3x USB 3.0 1 x µSD (SDXC)
Digital and analog interfaces	Parker PACIO extension modules	Parker PACIO extension modules
Field bus interfaces	EtherCAT master via Extender Module CANopen, galvanic isolated ProfiNet IO and IRT (PAC120-*P), EtherCAT Slave (PAC120-*T), EtherNet/IP Adapter (PAC120-*E) OPC UA server	EtherCAT Master Profinet-Device-IEC Ethernet/IP-Scanner, Ethernet/IP-Adapter OPC UA server
Clock	Real-time clock with battery buffering	Real-time clock, 72h buffer
Power supply	24 V DC (19.2... 28.8)	24 V DC (19.2... 28.8)
Potential separation	Modules are potential separated against each other and bus	Modules are potential separated against each other and bus
Industrial requirements	Protection class III according to EN 601131-2	Protection class III according to EN 601131-2
EMC	2004/108/EC	2014/30/EU emitted interference: EN 61000-6-4, industrial zone
Environmental conditions	Relative humidity 5 % ... 95 % w/o dew	Relative humidity max. 85%, non-condensing
CE conformity	2004/108/EC	CE (EN 61131-2)
UL certification	Certified: E-File-No. E506274	Available April 2022

Parker Remote I/O System PACIO

The PACIO System comprises a variety of modules for digital, analog and temperature signals as well as communication interfaces. The modules connect directly to the controller via the built-in EtherCAT bus for local architectures and are extended to remote locations via the extender and bus coupler modules, thus supporting both local and distributed I/O architectures. PACIO communicates natively on the EtherCAT bus, therefore it provides the full functionality and throughput of high-speed EtherCAT to meet the most demanding real-time requirements. For further information see Parker catalogue file for the PACIOs.



Module Type	Part Number	PACIO Description
Interfaces	PACIO-400-00	PACIO EtherCAT Bus coupler, 3 A
	PACIO-400-02	PACIO Extender 2 Port (EtherCAT I/O extender)
Accessories	PACIO-411-00	Power Distribution Module (distributes 0 VDC or 24 VDC attached at pins L1 or L2)
	PACIO-412-01	PACIO Shield 2x8 mm
	PACIO-412-02	PACIO Shield 14 mm
Analog	PACIO-441-01	PACIO AI4-mA (4 single-ended analog input module), 12 Bit resolution
	PACIO-441-02	PACIO AI4/8-VDC (4 differential/8 single-ended analog input module), 13 Bit
	PACIO-441-51	PACIO AI4-mA (4 single-ended analog input module), 12 Bit CoE
	PACIO-441-52	PACIO AI4/8-VDC (4 differential/8 single-ended analog input module), 13 Bit CoE
	PACIO-442-02	PACIO AO4-VDC/mA (4 analog output module), 12 Bit resolution
	PACIO-442-52	PACIO AO4-VDC/mA (4 analog output module), 12 Bit resolution CoE
Temperature	PACIO-443-01	PACIO AI4-Pt/Ni100 (4 analog inputs, 70 to 300 ohm resistance), 16 Bit
	PACIO-443-03	PACIO AI4-Pt/Ni1000 (4 analog inputs, 70 to 3000 ohm resistance), 16 Bit
	PACIO-443-06	PACIO AI8-Thermocouple, 16 Bit
	PACIO-443-57	PACIO AI4-Pt/Ni/Thermo, 16 Bit CoE
	PACIO-443-58	PACIO AI8-Pt/Ni/Thermo, 16 Bit CoE
Digital I/O Modules	PACIO-450-02	PACIO DI16/DO8 (16 inputs/8 outputs), 1 A
	PACIO-450-03	PACIO DI16/DO16 (16 inputs/16 outputs), 1 ms delay, 0.5 A
	PACIO-450-05	PACIO DI8/DO8 (8 inputs/8 outputs), 1 ms delay, 0.5 A
	PACIO-450-13	PACIO DI16/DO16 (16 inputs/16 outputs), 1 ms delay, 0.5 A Low-side
	PACIO-451-02	PACIO DI32 (32 inputs), 1 ms delay
	PACIO-451-03	PACIO DI16 (16 inputs), 1 ms delay
	PACIO-452-01	PACIO DO16 (16 outputs), 0.5 A
	PACIO-452-02	PACIO DO8 (8 outputs) 1 A
Counter	PACIO-454-01	PACIO Counter/Enc (encoder counter module)

Safety Controller

Safety PLC is a module intended to be integrated in EtherCAT® networks with Parker Motion Controller. Acting as the FSoE master, it is able to address any FSoE slave including safety I/Os, motion controllers and other FSoE equipment. The Safety PLC meets the requirements of IEC 61508 SIL3 and DIN EN ISO 13849 PLe. The main controller's CODESYS environment and the EtherCAT link are used for programming.




Part Number	Description
694.330.00	Safety PLC
694.430.00	Safety SDI4/SDO2 (4 safe inputs, 2 safe outputs)
694.430.10	Safety IO Module SDI8/SDO2
694.430.20	Safety IO Module SDI16/SDO4

Dimensions


PAC120 Dimensions

Dimensions [mm]

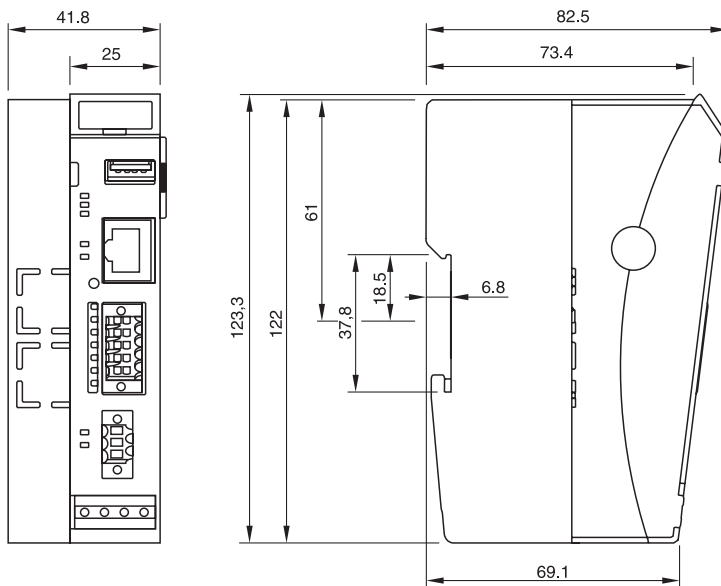


PAC340 Dimensions

Dimensions [mm]

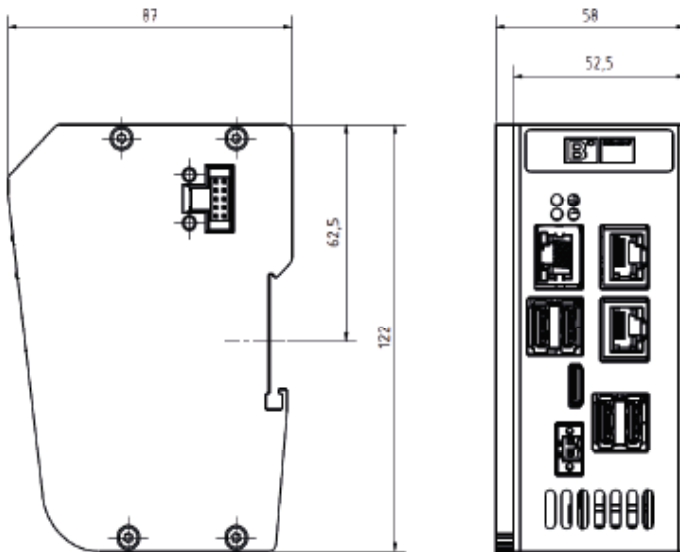

I/O Dimensions

Dimensions [mm]

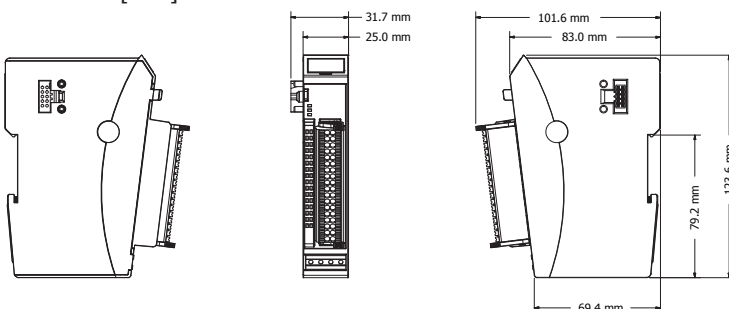

Order Code

Parker Motion Controller

	1	2		3	4	5	6	7		8	9		10		11
Order example	PAC	120	-	M	W	E	0	1	-	3	X	-	00	-	01

1	Series	
	PAC	Parker Motion controller
2	Type	
	120	
	340	
3	Software	
	M	IEC, PLCopen Motion
	C	IEC, PLCopen Motion, CNC (PAC340 only)
4	Visualization	
	W	Web Visualization
5	Communication	
	E	EtherNet/IP (PAC120 only)
	P	PROFINET IRT slave (PAC120 only)
	B	EtherNet/IP + PROFINET (PAC340 only)
6	Retentive Memory	
	0	128 kB (PAC120 only)
	1	200 kB (PAC340 only)
7	Processor	
	1	i.MX6 SoloX Freescale 1 GHz (PAC120)
	1	BCM2711, 1.5GHz Quad Core (PAC340)
8	Certification	
	3	UL / cUL / CE Certification
9	Reserved	
	X	Standard
10	Extended Software	
	00	Extended Software
11	Extended communication	
	01	Enhanced communication OPC UA



Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374



Aerospace **Key Markets**

Aftermarket services
Commercial transports
Engines
General & business aviation
Helicopters
Launch vehicles
Military aircraft
Missiles
Power generation
Regional transports
Unmanned aerial vehicles

Key Products

Control systems & actuation products
Engine systems & components
Fluid conveyance systems & components
Fluid metering, delivery & atomization devices
Fuel systems & components
Fuel tank inerting systems
Hydraulic systems & components
Thermal management
Wheels & brakes




Climate Control **Key Markets**

Agriculture
Air conditioning
Construction Machinery
Food & beverage
Industrial machinery
Life sciences
Oil & gas
Precision cooling
Process
Refrigeration
Transportation

Key Products

Accumulators
Advanced actuators
CO₂ controls
Electronic controllers
Filter driers
Hand shut-off valves
Heat exchangers
Hose & fittings
Pressure regulating valves
Refrigerant distributors
Safety relief valves
Smart pumps
Solenoid valves
Thermostatic expansion valves



Electromechanical **Key Markets**

Aerospace
Factory automation
Life science & medical
Machine tools
Packaging machinery
Paper machinery
Plastics machinery & converting
Primary metals
Semiconductor & electronics
Textile
Wire & cable

Key Products

AC/DC drives & systems
Electric actuators, gantry robots & slides
Electrohydraulic actuation systems
Electromechanical actuation systems
Human machine interface
Linear motors
Stepper motors, servo motors, drives & controls
Structural extrusions



Filtration **Key Markets**

Aerospace
Food & beverage
Industrial plant & equipment
Life sciences
Marine
Mobile equipment
Oil & gas
Power generation & renewable energy
Process
Transportation
Water Purification

Key Products

Analytical gas generators
Compressed air filters & driers
Engine air, coolant, fuel & oil filtration systems
Fluid condition monitoring systems
Hydraulic & lubrication filters
Hydrogen, nitrogen & zero air generators
Instrumentation filters
Membrane & fiber filters
Microfiltration
Sterile air filtration
Water desalination & purification filters & systems



Fluid & Gas Handling

Key Markets

Aerial lift
Agriculture
Bulk chemical handling
Construction machinery
Food & beverage
Fuel & gas delivery
Industrial machinery
Life sciences
Marine
Mining
Mobile
Oil & gas
Renewable energy
Transportation

Key Products

Check valves
Connectors for low pressure fluid conveyance
Deep sea umbilicals
Diagnostic equipment
Hose couplings
Industrial hose
Mooring systems & power cables
PTFE hose & tubing
Quick couplings
Rubber & thermoplastic hose
Tube fittings & adapters
Tubing & plastic fittings



Hydraulics

Key Markets

Aerial lift
Agriculture
Alternative energy
Construction machinery
Forestry
Industrial machinery
Machine tools
Marine
Material handling
Mining
Oil & gas
Power generation
Refuse vehicles
Renewable energy
Truck hydraulics
Turf equipment

Key Products

Accumulators
Cartridge valves
Electrohydraulic actuators
Human machine interfaces
Hybrid drives
Hydraulic cylinders
Hydraulic motors & pumps
Hydraulic systems
Hydraulic valves & controls
Hydrostatic steering
Integrated hydraulic circuits
Power take-offs
Power units
Rotary actuators
Sensors



Pneumatics

Key Markets

Aerospace
Conveyor & material handling
Factory automation
Life science & medical
Machine tools
Packaging machinery
Transportation & automotive

Key Products

Air preparation
Brass fittings & valves
Manifolds
Pneumatic accessories
Pneumatic actuators & grippers
Pneumatic valves & controls
Quick disconnects
Rotary actuators
Rubber & thermoplastic hose & couplings
Structural extrusions
Thermoplastic tubing & fittings
Vacuum generators, cups & sensors



Process Control

Key Markets

Alternative fuels
Biopharmaceuticals
Chemical & refining
Food & beverage
Marine & shipbuilding
Medical & dental
Microelectronics
Nuclear Power
Offshore oil exploration
Oil & gas
Pharmaceuticals
Power generation
Pulp & paper
Steel
Water/wastewater

Key Products

Analytical Instruments
Analytical sample conditioning products & systems
Chemical injection fittings & valves
Fluoropolymer chemical delivery fittings, valves & pumps
High purity gas delivery fittings, valves, regulators & digital flow controllers
Industrial mass flow meters/ controllers
Permanent no-weld tube fittings
Precision industrial regulators & flow controllers
Process control double block & bleeds
Process control fittings, valves, regulators & manifold valves



Sealing & Shielding

Key Markets

Aerospace
Chemical processing
Consumer
Fluid power
General industrial
Information technology
Life sciences
Microelectronics
Military
Oil & gas
Power generation
Renewable energy
Telecommunications
Transportation

Key Products

Dynamic seals
Elastomeric o-rings
Electro-medical instrument design & assembly
EMI shielding
Extruded & precision-cut, fabricated elastomeric seals
High temperature metal seals
Homogeneous & inserted elastomeric shapes
Medical device fabrication & assembly
Metal & plastic retained composite seals
Shielded optical windows
Silicone tubing & extrusions
Thermal management
Vibration dampening

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,
Dubai
Tel: +971 4 8127100

AT – Austria, St. Florian
Tel: +43 (0)7224 66201

BE/NL/LU – Benelux,
Hendrik Ido Ambacht
Tel: +31 (0)541 585 000

BY – Belarus, Minsk
Tel: +48 (0)22 573 24 00

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00

CZ – Czech Republic,
Prague
Tel: +420 284 083 111

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0

DK – Denmark, Ballerup
Tel: +45 43 56 04 00

ES – Spain, Madrid
Tel: +34 902 330 001

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25

HU – Hungary, Budaörs
Tel: +36 23 885 470

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370

IL – Israel
Tel: +39 02 45 19 21

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21

NO – Norway, Asker
Tel: +47 66 75 34 00

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00

PT – Portugal
Tel: +351 22 999 7360

RO – Romania, Bucharest

Tel: +40 21 252 1382

RU – Russia, Moscow
Tel: +7 495 645-2156

SE – Sweden, Borås
Tel: +46 (0)8 59 79 50 00

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650

TR – Turkey, Istanbul
Tel: +90 216 4997081

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878

ZA – South Africa, Kempton
Park
Tel: +27 (0)11 961 0700

Tel: +662 186 7000

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos
Campos
Tel: +55 080 0727 5374

CL – Chile, Santiago
Tel: +56 22 303 9640

MX – Mexico, Toluca
Tel: +52 72 2275 4200

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt
Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok

EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

